



Rectangular Roll-Off Containers

Product Specs Sheet



Iron Container manufactures a wide range of open and closed top roll off containers using first grade material and heavy duty parts. Strict quality controls mean our containers give you longer trouble free service. Beyond typical standard and heavy duty options, we also manufacture to custom specifications. Let us know what you need today.



Rectangular Roll Off Containers Specifications

Understructure	3" channel 3.5" per foot on 18" center
Cross members Gussets	2 gussets per cross alternate member
Main Rails/ Floor Sills	2" x 6" tubing 3/16" wall, with solid bull nose
HD Hook - Limited Lifetime Warranty	1 1/2" w x 5 1/2" h x 2 1/2" eye opening
Floor	3/16" steel plate
Rear Rollers/ Wheels	8" dia. x 6" long with grease fitting
Nose / Guide Rollers	4" dia. x 4" long with recessed grease fitting
Sides / Front Walls	12 ga (Rectangular)
Top Rails - Structural	4" x 3" x 3/16" tube
Side Braces	12 ga side post on 36" centers - plus front corner post
Hinges	2 heavy-duty hinges with grease fitting
Door Sheet	12 ga (Rectangular)
Rear Door	2-point latch, center guide and safety chain
Canvas Tie Down (Optional)	Optional
Paint	Primer inside and outside 2.0 mils, Industrial enamel finish to 2.0

Common Options and Heavy Duty Upgrades: Understructure- 3" channel 3.5" per foot on 12" center, Main Rails -2" x 6" tubing 1/4" wall, Hook - "H" frame or "A" frame lift hook, Floor - 1/4" steel plate, Front Ground Rollers - 8" dia. x 6" long with grease fitting, Sides and Front Walls - 10 ga (rectangular) or 3/16" (tub), Side Braces - 10ga side post (rectangular), Hinges - Extra hinge on 40YD, Door - 4' X 3' X 3/16" tube frame, Canvas Tie Down - Each side, front and door

8505 NW 74th Street
Miami, FL 33166

Phone: (305) 726-2150
Fax: (305) 400-4822


Email: info@ironcontainer.com
Web: www.ironcontainer.com



Rectangular Roll-Off Containers

Product Specs Sheet

Rectangular Style

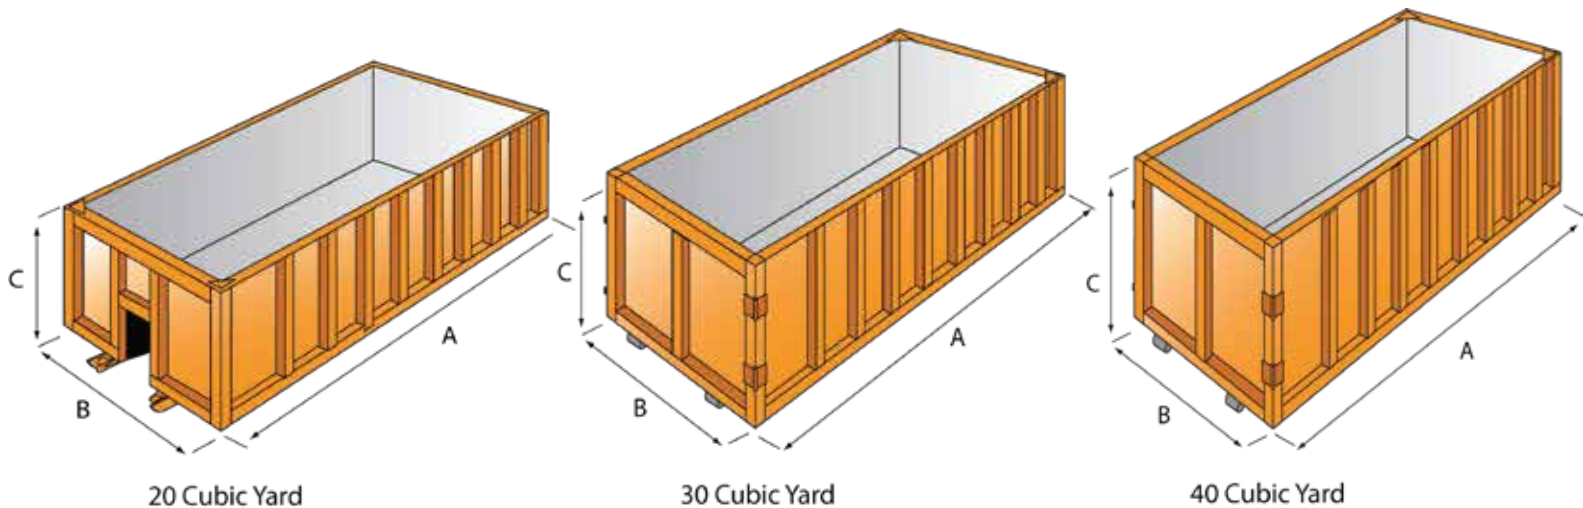

Rectangular Style Roll-Off Containers				
Nominal Size	Inside Height	Inside Length	Inside Width	Nominal Weight/ Standard Config. (lbs)
10YD	46"	117"	84"	2680
20YD	46"	237"	84"	4350
30YD	70"	237"	84"	5000
40YD	92"	237"	84"	5740
50YD	92"	297"	84"	